

Part - A
Detailed and Abstract Estimate

Name of Work: Model Estimate for Construction of Graveyard

Financial Year: 2015-16

Head of Account: MGNREGS

1a. Some of the rates adopted in this estimate are as per PW, P & IWTD, schedule of rates of Bengaluru circle for 2014-15 continued for 2015-16.

1b. The area weightage pertaining to the respective areas to be adopted as per respective schedule of rates of respective circles of respective departments.

2. Some of the rates adopted in this estimate are also Nrega SoR for year 2015-16.


3. This is only a model estimate, the Officer/Engineer-in-charge should visit the site and prepare the estimate based on (i) Actual site conditions. (ii) Foundation to be designed as per existing geological conditions.

4. The overall variations in the cost should not exceed 10% of the estimated cost. In case if it exceeds 10% same should be got approved from the Commissionerate.


5. KPPP 1999 should be followed while tendering and procurement of materials

6. The Contractor profit of 10% should be deducted in case of departmental works.

Sl.No.	Item as per SoR (Prevailing NREGA or Line Dept., or as approved Data Sheet)	Unit	Measurements				Quantity	Rate (in Rs.)	Amount (in Rs.) (Col 8 x 9)
			No.	Length	Breadth (in Mtr.)	Depth (in Mtr.)			
1	2	3	4	5	6	7	8	9	10
1	Erath work excavation in ordinary soils (upto 2.0m lift) for roads, rock fill dams, desilting of tanks for construction of contour / graded bunds in black soils / red soils / kanker / gravelly soils / laterite soils rates as per NREGS Annexure - I vide Page No. 7 and Item No. 3(a) * NREGS Rates of Govt. Order NO. RDP 230 NRE 2013 Bangalore Date: 21.03.2013								
	For Platform								
	LW	Cum	2	3.10	0.60	0.60	2.23		
	SW	Cum	2	4.00	0.60	0.60	2.88		
	For Sump	Cum	1	3.50	2.50	2.50	21.88		
							26.99	198.06	5,345.05
2	KSRB 4-1.3: Providing and laying in position plain cement concrete of mix 1:4:8 with OPC cement @ 180kgs, with 40mm and down size graded grnaite metal coarse agregates @ 0.85cum and fine aggregates @ 0.57cum machine mixed, madne mixed, concrete laid in layers not exceeding 15cms, thick, well compacted, in foundation, including cost of all materials, labour, HOM of machinery, curing complete as per specification. (P. No. 12 I.No. 4.3 of PWDSR 2014-15)								
	For Platform								
	LW	Cum	2	3.10	0.60	0.10	0.37		
	SW	Cum	2	4.00	0.60	0.10	0.48		
	For Sump	Cum	1	3.50	2.50	0.10	0.88		
							1.73	4,488.00	7,750.78
3	KSRB 5.2-3: Providing and constructing granite / trap / basalt size stone masonry in foundation with cement mortar 1:6, stone hammered dressed in courses not less than 20cms high, bond sotnes at 2m., apart in each course including cost of materials, labour, curing complete as per specifcaitons. (P. No. 23 I.No. 5.6 of PWDSR 2014-15)								
	For Platform								
	LW	Cum	2	3.10	0.60	0.45	1.67		
	SW	Cum	2	4.00	0.60	0.45	2.16		
							3.83	3,552.00	13,618.37
4	KSRB 5.3-3: Providing and constructing granite / trap / basalt size stone masonry in foundation with cement mortar 1:6, edges of stone chistle dressed in courses not less than 15cms high, bond sotnes at 2m., apart in each course including cost of materials, labour, curing complete as per specifcaitons. (P. No. 23 I.No. 5.9 of PWDSR 2014-15)								
	For Platform								
	LW	Cum	2	3.10	0.45	0.45	1.26		
	SW	Cum	2	4.00	0.45	0.45	1.62		
	For Cremation	Cum	1	1.80	1.50	0.45	1.22		
							4.09	4,206.00	17,204.64
5	KSRB 5.3-3: Providing and laying in position reinforced cement concrete of design mix M20 with OPC cement @320kgs., with 20mm and down size graded granie metal coarse aggregates @0.878cum and fine aggregates @0.459cu., with superlastisier @3lts conforming to IS9103-1999 Reaffirmed-2008, machine mixed, concrete laid in layers, not exceeding 15cms thick, vibrated for all works in foundation plinth and ground floor level for roof slabs, staircase, lintles, retaining walls, return walls, walls (any thickness) including attached plasters, columns, piers, abutments, pillars, posts, struts, buttressess, sting or lacing courses, parapets, coping, bed blocks, anchor blocks, plain window cills, fillets etc., including cost of all materials, labour, HOM of machinery, curing, complete as per the specifications. Specification No. KBS 4.1, 4.6 (I.No. 4.11 P. No. 13 of PWDSR 2014-15)								
	For Platform	Cum	1	4.00	4.00	0.15	2.40		
	For Sump	Cum	1	2.54	1.54	0.10	0.39		
	For Sump Slab	Cum	1	3.00	2.30	0.20	1.38		
							4.17	5,616.00	23,425.23
6	KSRB 15.1.3: Providing ruled pointing to coursed stone masonry with cement mortar 1:3, 20mm deep, after raking joints to depth of 20mm nicely lining, including cost of materials, labour, curing complete as per specifcaitons. (P. No. 109 I.No. 15.3 of PWDSR 2014-15)								

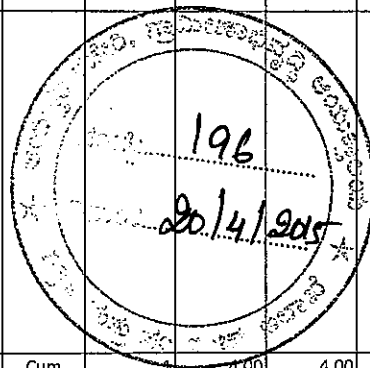

	For Platform									
	LW	Cum	2	3.10		0.45	2.79			
	SW	Cum	2	4.00		0.45	3.60			
							6.39	86.00	549.54	
7	KSRB 6-1.2: Providing and constructing burnt brick masonry for basement and superstructure with approved quality of non-modular bricks of standard size of class designation 3.5 Newton per sqmm with cement mortar 1:8 including cost of materials, labour charges, scaffolding, curing complete as per specifications. (P. No. 28 I.No. 6.17 of PWDSR 2014-15)									
	KSRB 6-1.3: -do- with cement mortar 1:6									
	For Platform									
	LW	Cum	2	2.54	0.23	2.00	2.34			
	SW	Cum	2	2.00	0.23	2.00	1.84			
	For Cremation	Cum	4	0.45	0.45	3.25	2.63			
							6.81	5,247.00	35,728.40	
8	Fabrication supplying and erecting MS Angular Truss for all spans as per approved designs and drawing. The entire truss is anchored suitably by using 4 Nos. of MS Anchor bolts at each support, with base plate and shoe plate. The work includes cutting, straightening, placing in position of MS Angle and welding wherever necessary, and applying one coat of red oxide primer coat to all the members including cost of all materials, labour charges, and hire charges of machineries for cutting, welding, grinding and erection equipments, etc., complete as per specification. (P. No. 41 I.No. 7.30 of PWDSR 2014-15)									
	Truss	Kg	4x2	18.95			151.60			
	Purlins	Kg	6x2	4.00			48.00			
	at 4.5 kg/mtr						199.60	123.00	24,550.80	
9	KSRB 13-3.8: Providing and fixing in trenches galvanised / mild steel tubes (medium grade) 80mm dia nominal bore with all fittings (earth work in trenches to be measure and paid for separately) including cost of all materials, labour charges, HOM of equipments and testing complete as per specifications. Specification No. KBS 13.2.14 / 13.6 (P. No. 87 I.No. 13.17 of PW, P & IWTD SR 2014-15)									
		Rmtr	4	4.00			16.00	817.00	13,072.00	
10	KSRB 8.3-1: Providing and laying to required line and slope roofing with corrugated asbestos cement sheet 6mm., thick fixed with galvanized iron J or L hooks, bolts and nuts 8mm., dia C.I. Plain and bitumen washers over the existing purlins, rafters and trusses including cost of specification.No. KBS 8.5 (P. No. 46 I.No. 8.3 of PW, P & IWTD SR 2014-15)									
		Sqm	1	4.00	4.00		16.00			
		Sqm	4	4.00	0.50		8.00			
							24.00	348.00	8,352.00	
11	Providing and filling in foundation with granite / trap broken metal 100mm and down size, with approved sand including hand packing, ramming, watering, including cost of all materials and labour with all lead and lift. Complete as per specification. (PWD SR 2013-14 P. No. 6 I. No. 2.15)									
	Platform	Cum	1	3.10	3.10	0.45	4.32	1,817.00	7,857.62	
12	KSRB 4.9.2: Providing TMT Steel reinforcement for RCC work including straightening, cutting, bending, hooking, placing in position, lapping and / or welding wherever required, tying with binding wire and anchoring to the adjoining members wherever necessary complete anchoring to the adjoining members wherever necessary complete as per design (laps, hooks and wastage shall not be measured and paid) cost of materials, labour, HOM of machinery complete as per specifications. Specification No. KBS 4.6.3 (P. No. 17 I. No. 4.46)									
	4.462 -do- TMT bars Fee 500									
		Qtl		Qty	2.00	Cum				
					114.00	Kg.				
				or Say	115.00	Kg.				
				or	1.15	Qtl	1.15	7,254.80	8,343.02	
13	KSRB 15-3.6: Providing 15mm thick cement plaster in single coat with cement mortar 1:6, to brick masonry including rounding off corners wherever required smooth rendering : Providing and removing scaffolding, including cost of materials, labour, curing as per specification. (I. No. 15.14 P. No. 109 of PWDSR 2014-15)									
	For Brick Pillar	Sqm	4x4		0.45	3.25	23.40	148.00	3,463.20	
14	Providing and fixing MS Gate as per Chief Architect drawing using 50mm x 50 x 14 guage MS Hollow pipe frame work bent ornamental as shown in the drawing 35mm x 6 and 16 x 16mm square rods for verticals alternatively spaced at 4cms center to center in halves and 40mm x 6mm MS flats for horizontal member under the top cast iron spikes are provided at alternate vertical members as shown in the drawing etc, complete. All the steel surface should be thoroughly cleaned free for rust and painted with anti-corrosive paint complete. The work includes cost of all materials, labour charges for all items of works, Hire charges for welding cutting and grinding equipments and electricity charges for welding cutting and grinding equipments and electricity charges with loading and unloading charges complete as per specification. (P. No. 42, I. No. 7.37 of PWDSR 2014-15)									
	For Gate	Sqm		4.00		2.00	8.00	3,172.00	25,376.00	
15	Providing and fixing 60x60 cms MS. Inspection door with necessary MS frame made out of MS Angle 50x50x6 mm and MS shutter of 31.5mm or BG 10 thick with hinges of top and locking arrangement painting etc., complete. (P. No. 31, I. No. 4.9 for GLSR of PHESR 2012-13)									

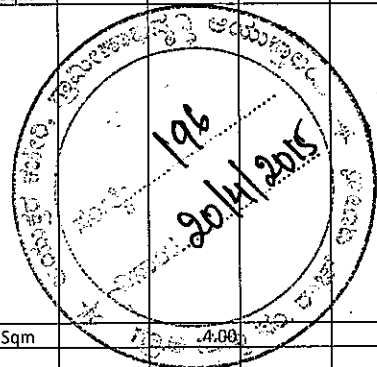


		Each	1				1.00	1,871.00	1,871.00
16	Erath work excavation in ordinary soils (upto 2.0m lift) for roads, rock fill dams, desilting of tanks for construction of contour / graded bunds in black soils / red soils / kanker / gravelly soils / laterite soils rates as per NREGS Annexure - I vide Page No. 7 and Item No. 3(a) * NREGS Rates of Govt. Order NO. RDP 230 NRE 2013 Bangalore Date: 21.03.2013								
		Cum	1	100.00	0.60	0.90	54.00	198.06	10,695.24
17	Providing and installing at site of work PVC Pipes including cost of pipes and specials and the labour including lowering into trenches, laying true to line, level and perfect linking at joints leak proof including jointing of approved type with all labour and lift charges handling charges including encasing the pipe all around to a depth not less than 15cm with gravel or selected earth available from the excavation etc., complete PVC Pipes of 6kg/cm ² -63mm (P. No. 15, I. No. 3.4.2 of PHESR 2012-13)								
		Mtr	1	100.00			100.00	112.00	11,200.00
18	KSRB 2.3: Filling available excavated earth (excluding rock) in sides of foundations upto plinth in layers not exceeding 20cms in depth, compacting each deposited layers by ramming after watering with lead upto 50m and lift upto 1.5m including cost of all labour complete as per specifications (P.No. 6 Item No. 2.10)								
		Cum	1	100.00	0.60	0.90	54.00	110.00	5,940.00
	Fencing (75m x 75m)								
19	Erath work excavation in ordinary soils (upto 2.0m lift) for roads, rock fill dams, desilting of tanks for construction of contour / graded bunds in black soils / red soils / kanker / gravelly soils / laterite soils rates as per NREGS Annexure - I vide Page No. 7 and Item No. 3(a) * NREGS Rates of Govt. Order NO. RDP 230 NRE 2013 Bangalore Date: 21.03.2013								
	Fencing Poles	Cum	74	0.30	0.30	0.30	2.00	198.06	395.72
20	KSRB 4-1.5: Providing and laying in position plain cement concrete of mix M20 with OPC Cement @ 300kgs, with 20mm and down size graded granite metal coarse aggregates @0.69cum and fine aggregates @0.43cum, with superplasticiser @3lts conforming to IS9103-1999 Reaffirmed-2008, machine mixed, concrete laid in layers not exceeding 15cms. thick, well compacted, in foundation, plinth and cills, including cost of all materials, labour, HOM of machinery, curing complete as per specification. Specification No. KBS 4.1, 4.2 (P. No. 12, I. No. 4.5 of PWDSR 2014-15)	Cum	74	0.30	0.30	0.40	2.66	5419	14,436.22
21	Providing and fixing RCC precast fencing pole of size 0.15m x 0.15m x 2.0m casted in CC 1:1.5:3 with 20mm downsize aggregate making holes for drawing barbed wire at 30cm c/c using 10mm dia vertical 4 TMT steel rods and 8mm dia stirrups at 15cm c/c fixed 1.5m above ground level using steel moulding, curing, transportation to work spot including excavation in hard soil moulding, curing, trasporation to work spot including excavation in hard soil fixing in plain cement concrete 1:2:4 using 20mm downsize aggregate including-aligning-to-plumb-and-line-providing-including-cost-of-all-materials, labour, hire charge of machineries lead, lift loading and unloading etc., complete (P. No. 256, I. No. 37.64 of PWDSR 2014-15)	No.	74				74.00	1439	1,06,486.00
22	Providing barbed GI wire fencing of 12x12 guage drawn into stone pillars or iron pillars including drawing in holes wherever necessary excluding the cost of pillars but including the cost of barbed wire and binding wire etc., complete. (P. No. 252, I. No. 37.5 of PWDSR 2014-15)								
	One Panel (4x3.6+2x3.9) = 22.2 x 75 = 1665 Mtr.	Rmtr	1665				1,665.00	26	43,290.00
23	Gate and Supporting structure	Lum							9,414.00
								Total	3,98,364.82
24	Add 1% for Technical Supervision								3,983.65
25	Add for sharpening charges 243x@Rs. 10/day/person								2,430.00
26	Name board and rounding off								1,221.53
								Grand Total	4,06,000.00

Sign of Engineer

Sign of PDO / Secretary and Seal


Sign of President of GP and Seal

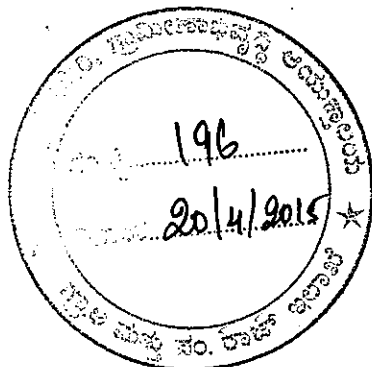


Part - B
Detailed Estimation (Calculation) of Labour and Material requirement

Name of Work:
Financial Year:
Head of Account:


Sl.No.	Item as per SOR (Prevailing NREGA or Line Dept., or as approved Data Sheet) as in Part - A detailed and abstract estimate	Unit	Qty	Coeff for unskilled labour	Unskilled Labour Component			Total Amt.	Skilled, Semi skilled wage and Material component including essential machinery like rollers etc but excluding unskilled labour displacing machinery Amount (in Rs.)(Col 9 - 8)
					No. of Person Days	Wage rate for 2015-16 fixed by Govt, MoRD	Amount (in Rs.) (Col 6 x 7)		
1	2	3	4	5	6	7	8	9	10
1	Earth work excavation in ordinary soils (upto 2.0m lift) for roads, rock fill dams, desilting of tanks for construction of contour / graded bunds in black soils / red soils / Kanher / gravelly soils / laterite soils rates as per NREGS Annexure - I vide Page No. 7 and Item No. 3(a) * NREGS Rates of Govt. Order NO. RDP 230 NRE 2013 Bangalore Date: 21.03.2013	Cum	26.99	0.97	26.18	204.00	5,340.19	5,345.05	4.86
2	KSRR 4-1-3: Providing and laying in position plain cement concrete of mix 1:4:8 with OPC cement @ 180kgs, with 40mm and down size graded granite metal coarse aggregates @ 0.85cum and fine aggregates @ 0.57cum machine mixed, machine mixed, concrete laid in layers not exceeding 15cms, thick, well compacted, in foundation, including cost of all materials, labour, HOM of machinery, curing complete as per specification. (P. No. 12 I.No. 4.3 of PWDSR 2014-15)	Cum	1.73	3.18	5.49	204.00	1,120.34	7,750.78	6,630.44
3	KSRR 5-2-3: Providing and constructing granite / trap / basalt size stone masonry in foundation with cement mortar 1:6, stone hammered dressed in courses not less than 20cms high, bond courses at 2m, apart in each course including cost of materials, labour, curing complete as per specifications. (P. No. 23 I.No. 5.6 of PWDSR 2014-15)	Cum	3.83	2.40	9.20	204.00	1,877.13	13,618.37	11,741.24
4	KSRR 5-3-3: Providing and constructing granite / trap / basalt size stone masonry in foundation with cement mortar 1:6, edges of stone chistle dressed in courses not less than 15cms high, bond courses at 2m, apart in each course including cost of materials, labour, curing complete as per specifications. (P. No. 23 I.No. 5.9 of PWDSR 2014-15)	Cum	4.09	2.40	9.82	204.00	2,002.71	17,204.64	15,201.93
5	KSRR 5-3-3: Providing and laying in position reinforced cement concrete of design mix M20 with OPC cement @320kgs., with 20mm and down size graded granite metal coarse aggregates @0.878cum and fine aggregates @0.459cu., with superplasticiser @3lts conforming to IS9103-1999 Reaffirmed-2008, machine mixed, concrete laid in layers, not exceeding 15cms thick, vibrated for all works in foundation plinth and ground floor level for roof slabs, staircase, linties, retaining walls, return walls, walls (any thickness) including attached plasters, columns, piers, abutments, pillars, posts, struts, buttresses, string or lacing courses, parapets, coping, bed blocks, anchor blocks, plain window cills, fillets etc., including cost of all materials, labour, HOM of machinery, curing, complete as per the specifications. Specification No. KBS 4.1, 4.6 (I.No. 4.11 P. No. 13 of PWDSR 2014-15)	Cum	4.17	3.18	13.26	204.00	2,705.91	23,425.23	20,719.32

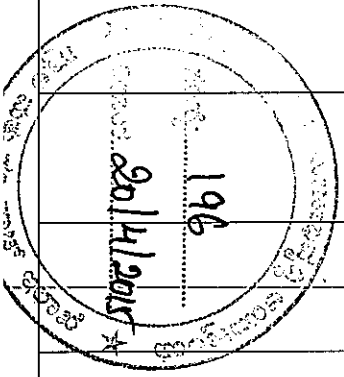


6	KSRB 15.1.3: Providing ruled pointing to coursed stone masonry with cement mortar 1:3, 20mm deep, after raking joints to depth of 20mm nicely lining, including cost of materials, labour, curing complete as per specifications. (P. No. 109 I.No. 15.3 of PWDSR 2014-15)	Cum	6.39	0.17	1.09	204.00	221.61	549.54	327.93
7	KSRB 6-1.2: Providing and constructing burnt brick masonry for basement and superstructure with approved quality of non-modular bricks of standard size of class designation 3.5 Newton per sqmm with cement mortar 1:8 including cost of materials, labour charges, scaffolding, curing complete as per specifications. (P. No. 28 I.No. 6.17 of PWDSR 2014-15)	Cum	6.81	2.30	15.66	204.00	3,194.92	35,728.40	32,533.00
8	Fabrication supplying and erecting MS Angular Truss for all spans as per approved designs and drawing. The entire truss is anchored suitably by using 4 Nos. of MS Anchor bolts at each support, with base plate and shoe plate. The work includes cutting, straightening, placing in position of MS Angle and welding wherever necessary, and applying one coat of red oxide primer coat to all the members including cost of all materials, labour charges, and hire charges of machineries for cutting, welding, grinding and erection equipments, etc., complete as per specification. (P. No. 41 I.No. 7.30 of PWDSR 2014-15)	Kg	199.60	0.05	10.38	204.00	2,117.56	24,550.80	22,433.44
9	KSRB 13-3-3: Providing and fixing in trenches galvanized / mild steel tubes (medium grade) 80mm dia nominal bore with all fittings (earth work in trenches to be measure and paid for separately) including cost of all materials, labour charges, HOM of equipments and testing complete as per specifications. Specification No. KBS 13.2.14 / 13.6 (P. No. 87 I.No. 13.17 of PW, P & IWTD SR 2014-15)	Rmtr	16.00	0.07	1.06	204.00	215.42	13,072.00	12,856.58
10	KSRB 8.3-1: Providing and laying to required line and slope roofing with corrugated asbestos cement sheet 6mm., thick fixed with galvanized iron J or L hooks, bolts and nuts 8mm., dia C.I. Plain and bitumen washers over the existing purlins, rafters and trusses including cost of specification.No. KBS 8.5 (P. No. 46 I.No. 8.3 of PW, P & IWTD SR 2014-15)	Sqrm	24.00	0.08	1.90	204.00	386.78	8,352.00	7,965.22
11	Providing and filling in foundation with granite / trap broken metal bottom and down size, with approved sand including hand packing, ramming, watering, including cost of all materials and labour with all lead and lift. Complete as per specification. (PWD SR 2013-14 P. No. 6 I. No. 2.15)	Cum	4.32	0.50	2.16	204.00	441.10	7,857.62	7,416.52
12	KSRB 4.9.2: Providing TMT Steel reinforcement for RCC work including straightening, cutting, bending, hooking, placing in position, lapping and / or welding wherever required, tying with binding wire and anchoring to the adjoining members wherever necessary complete as per design (lags, hooks and wastage shall not be measured and paid) cost of materials, labour, HOM of machinery complete as per specifications. Specification No. KBS 4.6.3 (P. No. 17 I. No. 4.46)	Qtl	1.15	10.00	11.50	204.00	2,346.00	8,343.02	5,997.02
13	KSRB 15-3-6: Providing 15mm thick cement plaster in single coat with cement mortar 1:6 to brick masonry including rounding off corners wherever required smooth rendering : Providing and removing scaffolding, including cost of materials, labour, curing aps per specification. (I. No. 15.14 P. No. 109 of PWDSR 2014-15)	Sqrm	23.40	0.18	4.21	204.00	859.25	3,463.20	2,603.95

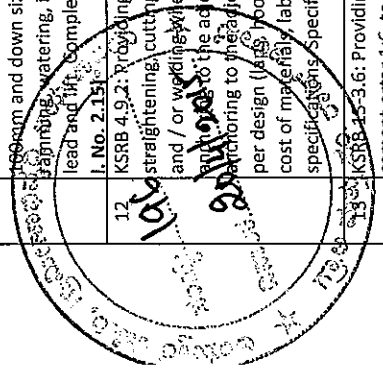


14	Providing and fixing MS Gate as per Chief Architect drawing using 50mm x 50 x 14 gauge MS Hollow pipe frame work bent ornamental as shown in the drawing 35mm x 6 and 16 x 16mm square rods for verticals alternatively spaced at 4cms center to center in halves and 40mm x 6mm MS flats for horizontal member under the top cast iron spikes are provided at alternate vertical members as shown in the drawing etc, complete. All the steel surface should be thoroughly cleaned free for rust and painted with anti-corrosive paint complete. The work includes cost of all materials, labour charges for all items of works, Hinge charges for welding cutting and grinding equipments and electricity charges for welding cutting and grinding equipments and electricity charges with loading and unloading charges complete as per specification. (P. No. 42, I. No. 737 of PWD/SR 2014-15)	Sqm	8.00	0.28	2.22	204.00	452.06	25,376.00	24,923.94
15	Providing and fixing 60x60 cms MS Inspection door with necessary MS frame made out of MS Angle 50x50x6 mm and MS shutter of 31.5mm or BG 10 thick with hinges of top and locking arrangement painting etc., complete. (P. No. 31, I. No. 4.9 for G/SR of PHE/SR 2012-13)	Each	1.00	0.00	0.00	204.00	0.00	1,871.00	1,871.00
16	Earth work excavation in ordinary soils (upto 2.0m lift) for roads, rock fill dams, desilting of tanks for construction of contour / graded bunds in black soils / red soils / kanker / gravelly soils / laterite soils rates as per NREGS Annexure - I vide Page No. 7 and Item No. 3(a) * NREGS Rates of Govt. Order NO. RDP 230 NRE 2013 Bangalore Date: 21.03.2013	Cum	54.00	0.97	52.38	204.00	10,685.52	10,695.24	9.72
17	Providing and installing at site of work PVC Pipes including cost of pipes and specials and the labour including lowering into trenches, laying true to line, level and perfect linking at joints leak proof including jointing of approved type with all labour and lift charges handling charges including encasing the pipe all around to a depth not less than 15cm with gravel or selected earth available from the excavation etc., complete PVC Pipes of 6kg/cm ² -63mm (P. No. 15, I. No. 3.4.2 of PHE/SR 2012-13)	Mtr	100.00	0.00	0.00	204.00	0.00	11,200.00	11,200.00
18	KSRS 2.3: filling available excavated earth (excluding rock) in sides of foundations upto plinth in layers not exceeding 20cms in depth, compacting each deposited layers by ramming after watering with lead upto 50m and lift upto 1.5m including cost of all labour complete as per specifications (P. No. 6 Item No. 2.10)	Cum	54.00	0.40	21.60	204.00	4,406.40	5,940.00	1,533.60
19	Earth work excavation in ordinary soils (upto 2.0m lift) for roads, rock fill dams, desilting of tanks for construction of contour / graded bunds in black soils / red soils / kanker / gravelly soils / laterite soils rates as per NREGS Annexure - I vide Page No. 7 and Item No. 3(a) * NREGS Rates of Govt. Order NO. RDP 230 NRE 2013 Bangalore Date: 21.03.2013	Cum	2.00	0.97	1.94	204.00	395.36	395.72	0.36
	Finishing (75m x 75m)								

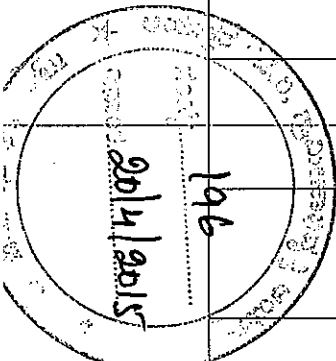

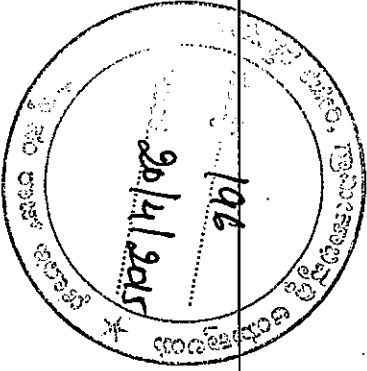

Approach Road



Gate

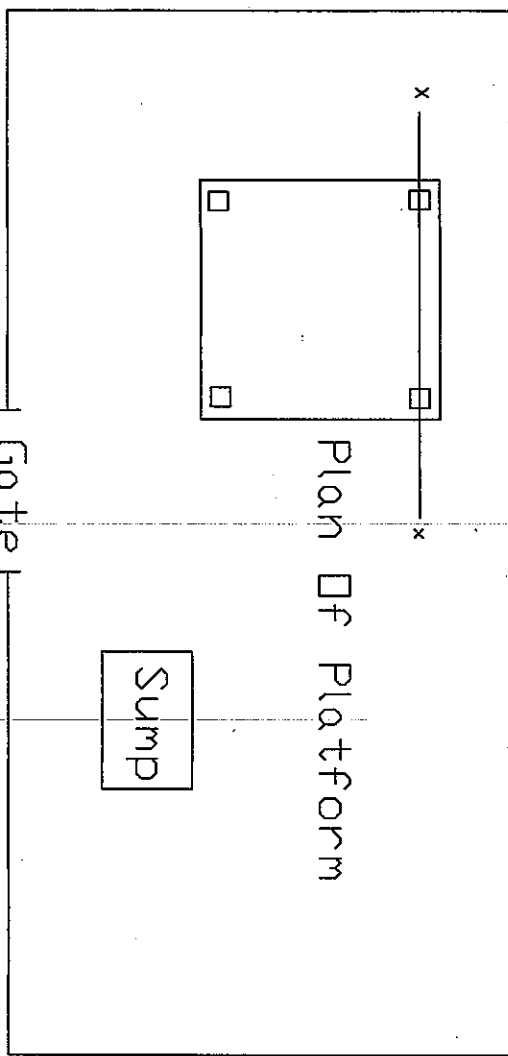

Plan of Platform

→ Fencing

Platform Cross Section at X-X

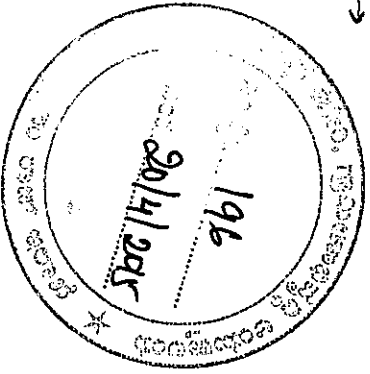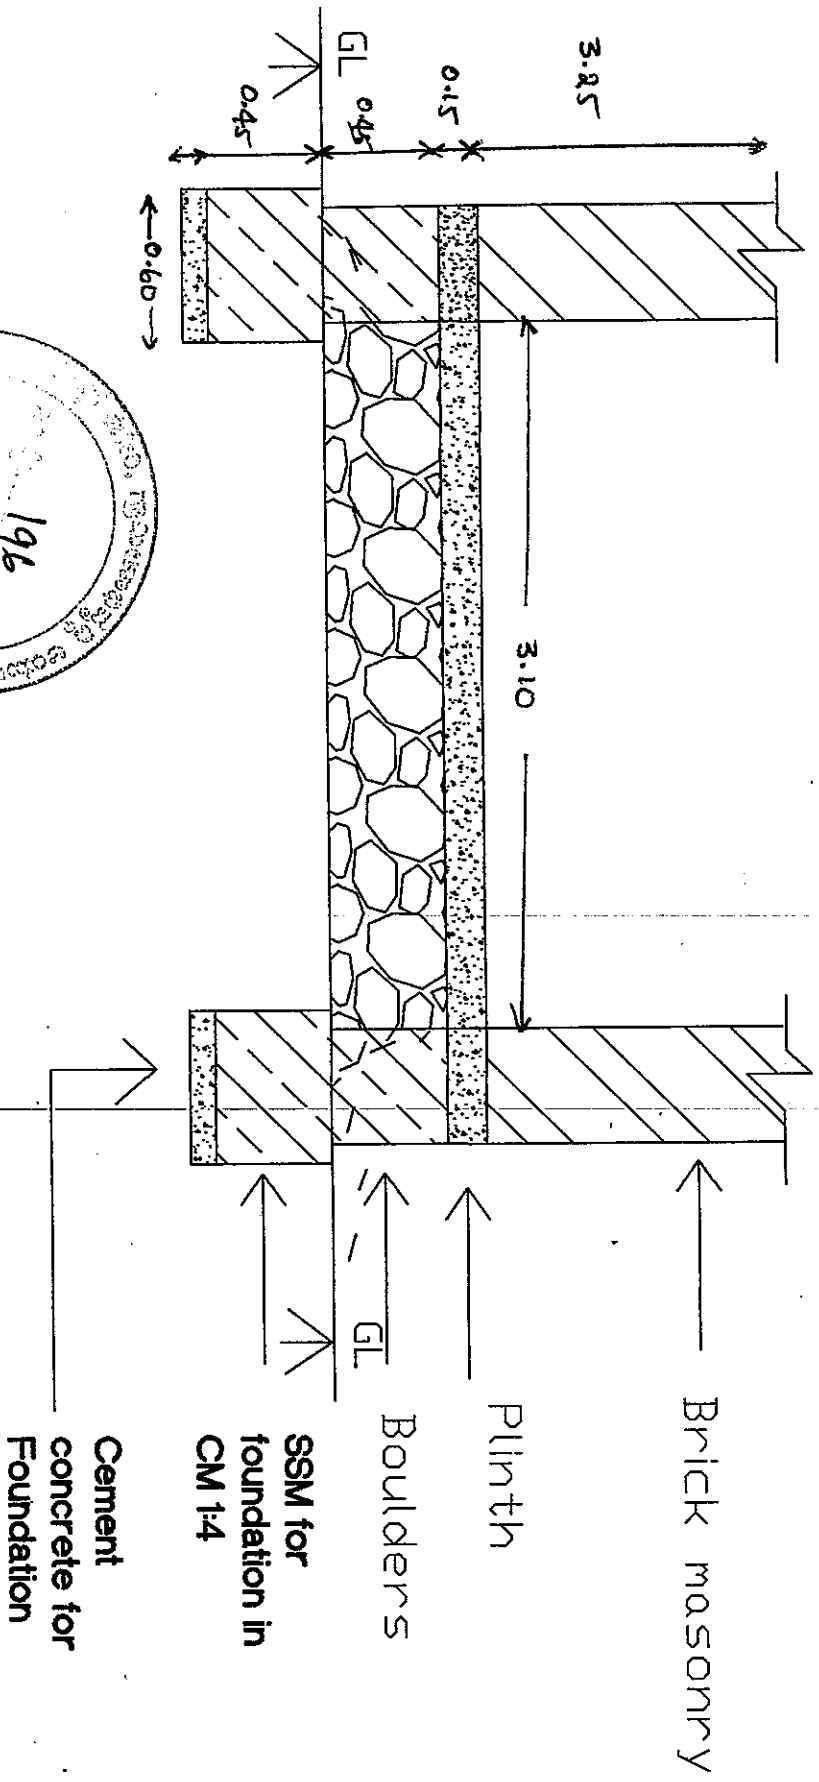

Cross Section Of Sump

